


T51X SERIES


HD VIDEOSCOPE




Strong intelligent image processing system: with the functions of mage rotation, white balance, exposure control, negative film and zoom in & out, comparative measurement, it can meet all kinds of complicated inspection

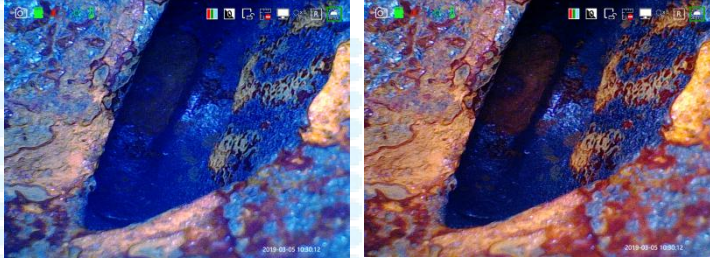


White Balance: Auto white balance with strong color reduction; manual-control white balance according to inspection needs.

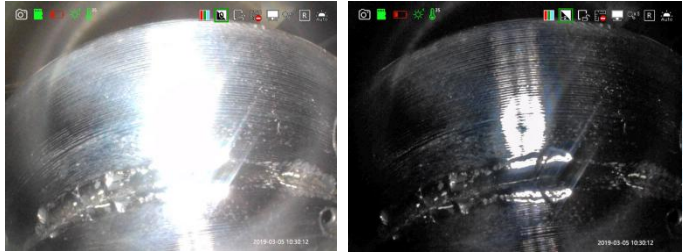

Exposure Setting: exposure suppression--the polished object is also inspected clearly; exposure compensation--when checking large cavity, it can be more effective and clearer

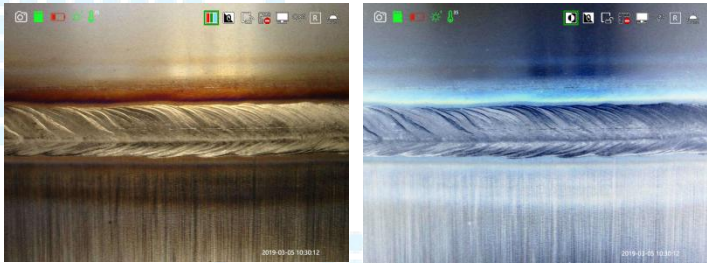

Normal Mode: HD image effect Negative Film Mode: Enhance the ability to compare and analyze the internal defects of the inspected objects.

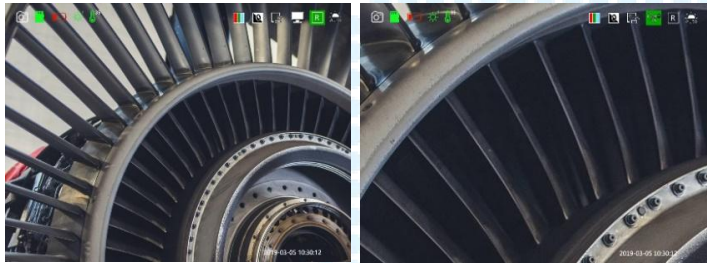

Support 8X zoom in/out




FLEXIBLE ARTICULATION CONTROL

360° joystick-control articulation, damping type positioning design, precise probe locking technology, make the detection more accurate and efficient. Independently developed technology of long-distance transmission ensures bending angle $\geq 100^\circ$, even the tube reaches 10 meters.



360° precision articulation

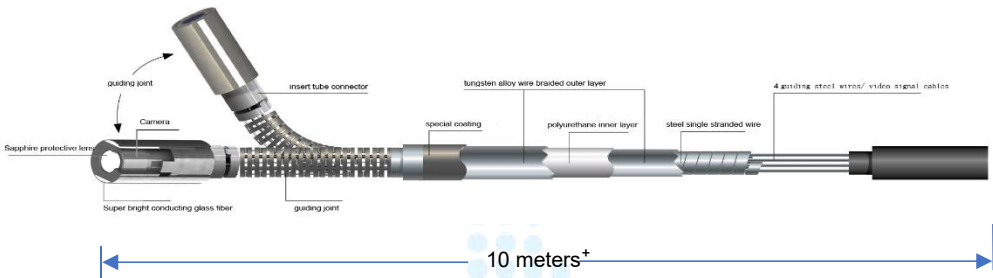

maximum bending angle $\geq 190^\circ$



STRONG HARDWARE

T51X series videoscope is module designed. Configured with 5.1 inches HD display, it can be interchangeable with 3.5 inches small display, suitable for different inspection requirements. The monitor and probe can be separated by one button. It is compatible with different diameter tubes like: 1.8mm/2.2mm/2.8mm/3.8mm/6mm, as well as 3.8mm&6mm sideview tubes and 6mm dual lens tube.




High temperature alarm function: Orange alarm when the temperature is above 65 °C; Red alarm and shutdown when the temperature is more than 80 °C.



Original dual battery design, 8 hours working time; real-time battery indication



The image can be outputted to HD display by HDMI.

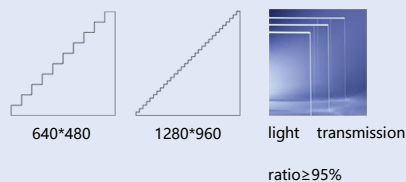

Display resolution: 1280*960, high light, wide color gamut, all sight viewing angle, ensure clear image, rich colors and good color reproduction.

QUALITY ASSURANCE

All products are complied with RoHS, CE and ISO standard and passed testing for temperature, waterproof, drop, vibration and pressure. We devote ourselves to providing high-quality professional inspection instrument to every customer.



PARAMETERS

Tube System	Probe Diameter(mm)	Φ1.8/Φ2.2/Φ2.8	Φ3.8/Φ6
	Camera Pixels	300,000	1,000,000
	Image Resolution	640×480	1280×720
	Video Resolution	640×480	1280×720
	DOF	3mm-50mm/5mm-80mm	10-100mm/5-80mm/5-150mm/50mm-∞
	FOV	90°/120°	
	Viewing Direction	0° front view/ 90° sideview/ front view& sideview dual lens	
	Light Source	Front ceramic light/ Rear-mounted optic fiber cold	
	Illuminance	Maximum: 100000+Lx 1~9 levels adjustable light	
	Tube Length	1.5m/3.0m/5.0m/30m (customized for other length)	
	Protecting Device of Durability	42mm buffer protection device between tube and handle	
	Articulation	2-way / 360° joystick-control articulation	
	Bending Angle	Maximum:190°	
	Probe Positioning	Damping positioning & articulation lock device	
	Wi-Fi Transmission	Image transmission to Mobile phone, computer by Wi-Fi(optional)	
Monitor System	Display	5.1" color IPS display, all sight viewing angle, sunshade design	
	Display Resolution	1280*960	
	Zoom In/Out	8X	
	Language	English / French / German / Spanish / Japanese / Traditional Chinese / Simplified Chinese / Russian / Korean	
	White Balance Suppression	5 levels adjustable	
	White Balance	Auto white balance, automatically adjusts and eliminates speckles to achieve optimal images.	
	Image Effect	Negative film/ black & white/standard	
	Temperature Indication	High temperature alarm (optional)	
	IP Level	Probe/tube: IP67	
	Software Function	Playback, image parameters adjust and rotate	
	Structure	Hand-held integrated design	
	Image/Video Format	JPEG/MOV	

	Comparative Measurement	Use measuring probe and analog scale to compare and analyze the internal defect and size of the inspected object.
	Data Port	HDMI video output, Micro USB port with water & dust proof device
	Working Time	≥8h
	Battery Capacity	3.7V, 3200mAh×2
	Power Charge	DC5V, 1A
	Weight	≤0.8Kg
	Compatibility	Interchangeable monitor and tube with different diameters
Accessories	Standard Configuration	Instrument case: 1pc; videoscope: 1 set; battery: 2pcs; card reader: 1pc; 16G. TF card: 1pc; charger: 1pc; USB cable: 1pc; user manual: 1 set

Due to product updates, the final parameters should be based on specific models.

Supplied By:
TEST AND MEASUREMENT INSTRUMENTS C.C.
www.instrumentsgroup.co.za
Tel: 011 683 4365
Email: sales@instrumentsgroup.co.za